

AHRI 1060-2005

Certified Performance

AHRI-1060 Certified Performance - Model Number L85-G5												
Type	Tilt Angle				Nominal Airflow				Pressure Drop			
Plate	N/A				100% - 450 SCFM 75% - 338 SCFM				0.6 in. H ₂ O 0.5 in. H ₂ O			
Leakage Ratings					Thermal Effectiveness Ratings at 0" Pressure Differential							
	Pressure Differential	EATR	OACF	Purge Angle or Setting	Nominal Airflow	Sensible	Latent	Total	Net Airflow	Net Sensible	Net Latent	Net Total
Test 1	-1 in. H ₂ O	1.0%	1.00	N/A	450 Heating CFM Cooling	73% 73%	53% 46%	66% 56%	450 CFM	73% 73%	53% 46%	66% 56%
Test 2	0 in. H ₂ O	0.0%	1.02	N/A	338 Heating CFM Cooling	77% 77%	60% 52%	71% 61%	338 CFM	77% 77%	60% 52%	71% 61%
Test 3	1 in. H ₂ O	0.0%	1.05	N/A								


AHRI-1060 Certified Performance - Model Number L125-G5												
Type	Tilt Angle				Nominal Airflow				Pressure Drop			
Plate	N/A				100% - 750 SCFM 75% - 563 SCFM				0.65 in. H ₂ O 0.45 in. H ₂ O			
Leakage Ratings					Thermal Effectiveness Ratings at 0" Pressure Differential							
	Pressure Differential	EATR	OACF	Purge Angle or Setting	Nominal Airflow	Sensible	Latent	Total	Net Airflow	Net Sensible	Net Latent	Net Total
Test 1	-1 in. H ₂ O	1.0%	1.00	N/A	750 Heating CFM Cooling	71% 71%	52% 43%	64% 53%	750 CFM	71% 71%	52% 43%	64% 53%
Test 2	0 in. H ₂ O	0.0%	1.02	N/A	563 Heating CFM Cooling	75% 75%	59% 50%	69% 59%	563 CFM	75% 75%	59% 50%	69% 59%
Test 3	1 in. H ₂ O	0.0%	1.05	N/A								

NOTE: SCFM = Standard Cubic Feet per Minute OACF = Outdoor Air Correction Factor EATR = Exhaust Air Transfer Ratio N/A = Not Applicable

Energy recovery component certified in accordance with AHRI Standard 1060-2005.
Actual performance in packaged equipment may vary.



MODEL NUMBERING GUIDE *Not all options are available on every model.*

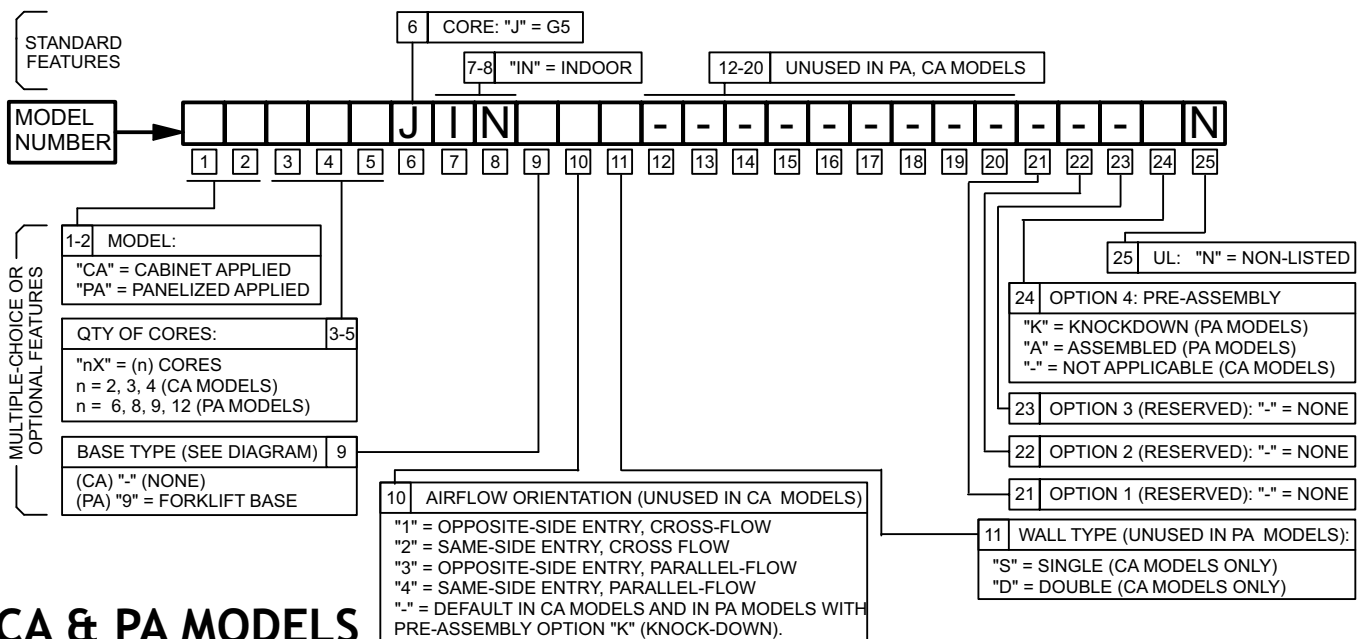

CA & PA MODELS