

EV200



Indoor Unit



G4 Performance


| Airflow CFM | ESP in H ₂ O | Temp EFF% | Total EFF% Winter/Summer* |
|-------------|-------------------------|-----------|---------------------------|
| 122 | 0.70 | 82 | 74/59 |
| 149 | 0.65 | 80 | 72/56 |
| 168 | 0.50 | 79 | 70/55 |
| 176 | 0.40 | 78 | 69/54 |
| 186 | 0.30 | 77 | 68/53 |
| 192 | 0.20 | 77 | 68/52 |
| 200 | 0.10 | 76 | 67/52 |

* (See HVI certification report on page 66 for complete certified rating).

Specifications

| Ventilation Type: Static Plate, Heat and Humidity Transfer | | | | |
|--|----|--------|---------------|-----|
| Typical Airflow Range: 100-200 CFM | | | | |
| Number Motors: One, 0.1 hp | | | | |
| V | HZ | Phase | Input Watts | FLA |
| 120 | 60 | Single | 157 @ 181 CFM | 1.5 |
| Control Voltage: 24 VAC | | | | |
| Filters: MERV 8, spun polyester media. 10 1/2" x 21 3/4" x 1" | | | | |
| Weight: 70 lbs (unit), 82 lbs (in carton) | | | | |
| Shipping Dimensions: 21 1/2"W x 32"L x 29"H | | | | |
| Options: PTL - Percentage Timer Control PBL - Push Button Point-of-Use Controls FM - Percentage Timer Control with Furnace Interlock DH24 - Dehumidistat Control Wall Caps | | | | |

Dimensions

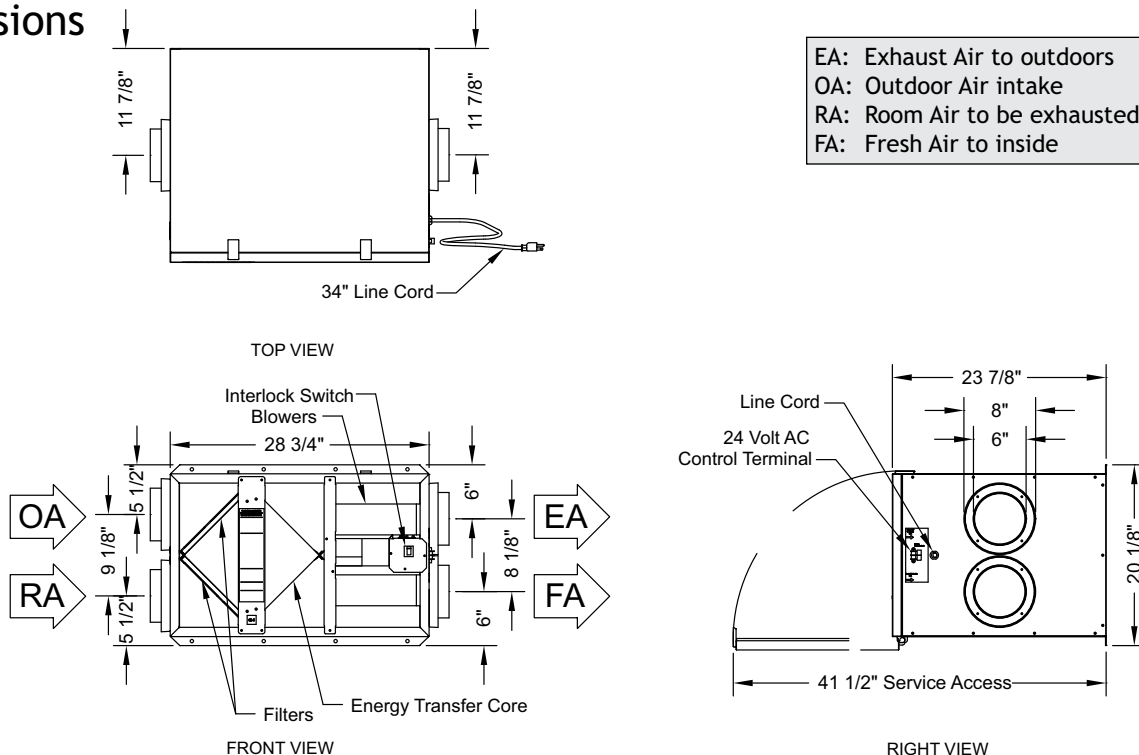

EA: Exhaust Air to outdoors
 OA: Outdoor Air intake
 RA: Room Air to be exhausted
 FA: Fresh Air to inside