

# EV300



## Indoor Unit



## Specifications


Ventilation Type: Static Plate, Heat and Humidity Transfer				
Typical Airflow Range: 150-300 CFM				
Number Motors: One, 0.2 hp				
V	HZ	Phase	Input Watts	FLA
120	60	Single	310 @ 293 CFM	3.3
Control Voltage: 24 VAC				
Filters: MERV 8, spun polyester media. 10 1/2" x 21 3/4" x 1"				
Weight: 72 lbs (unit), 85 lbs (in carton)				
Shipping Dimensions: 21 1/2"W x 32"L x 29"H				
Options: PTL - Percentage Timer Control PBL - Push Button Point-of-Use Controls FM - Percentage Timer Control with Furnace Interlock DH24 - Dehumidistat Control 8" Wall Caps				

## G4 Performance

Airflow CFM	ESP in H <sub>2</sub> O	Temp EFF%	Total EFF% Winter/Summer*
155	1.0	80	70/51
199	0.9	76	67/48
249	0.8	72	62/44
268	0.7	71	61/42
289	0.6	69	58/39
300	0.5	68	57/38
310	0.4	67	56/37

\* (See HVI certification report on page 66 for complete certified rating).

## Dimensions

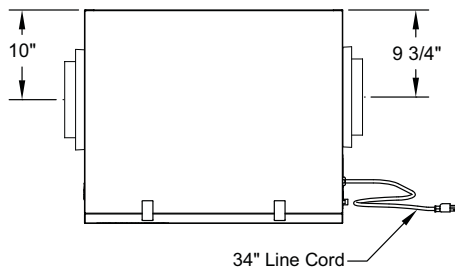

EA: Exhaust Air to outdoors  
OA: Outdoor Air intake  
RA: Room Air to be exhausted  
FA: Fresh Air to inside

