


# HE1XRT




## Outdoor Unit

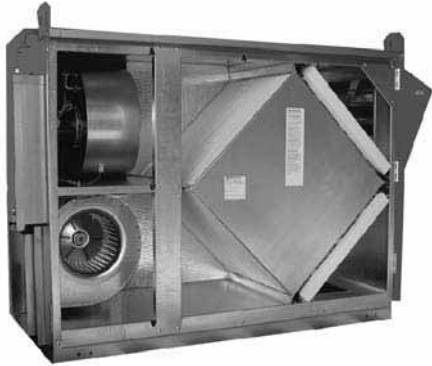

## Specifications


Ventilation Type: Static Plate, Heat and Humidity Transfer					
Typical Airflow Range: 250-870 CFM					
AHRI 1060 Certified Core: One L125-00					
Airflow Rating Points (for AHRI): 750 CFM and 560 CFM					
Number Motors: Two					
V	HZ	Phase	FLA	Min. Cir. Amps	Max. Fuse Size
115	60	Single	8.6	19.4	25
208-230	60	Single	4.3	9.7	15
277	60	Single	2.4	5.4	15
208-230	60	Three	2.1	5.2	15
460	60	Three	1.1	2.6	15
Control Voltage: 24 VAC					
Filters: Two total, MERV 8, 2" pleated, 20" x 20" nominal size					
Weight: 250 lbs (unit), 330 lbs (shipping weight)					
Shipping Dimensions: 31" W x 76" L x 45" H					
Options: Controls (see pages 64 & 65) Roof curb Alternate duct connections					

## G5 Performance

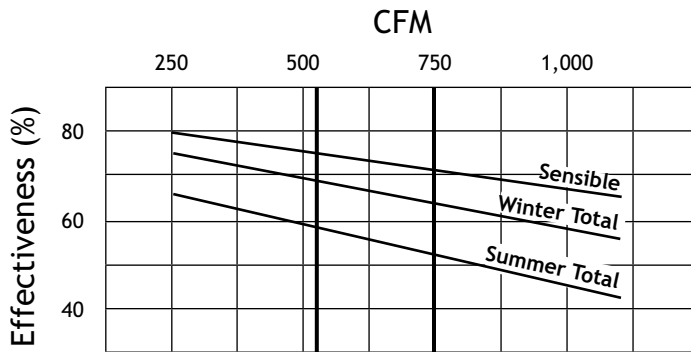

\*At AHRI 1060 standard conditions  
(See certified data on page 67 for core components.)

## Base Type/Airflow Orientations

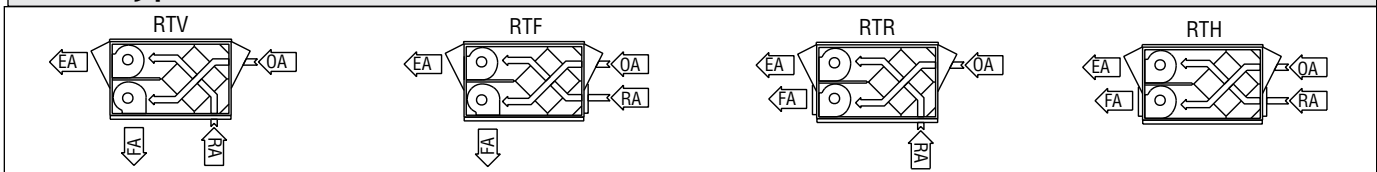

## Airflow Performance

Motor HP Phase	External Static Pressure (Inches Water Column)						
	0.0	0.25	0.5	0.75	1.0	1.25	1.5
0.75 (Two DD) Single Phase	950 CFM 1,630 Watts	880 CFM 1,550 Watts	820 CFM 1,475 Watts	775 CFM 1,430 Watts	730 CFM 1,385 Watts	650 CFM 1,300 Watts	540 CFM 1,200 Watts
0.75 (Two DD) Three Phase	950 CFM 1,200 Watts	880 CFM 1,100 Watts	820 CFM 1,020 Watts	760 CFM 980 Watts	660 CFM 890 Watts	560 CFM 800 Watts	450 CFM 700 Watts

# HEIXRT UNIT DIMENSIONS

EA: Exhaust Air to outdoors  
 OA: Outdoor Air Intake  
 RA: Room Air to be exhausted  
 FA: Fresh Air to inside

