


# HE1XRTC




## Outdoor Unit

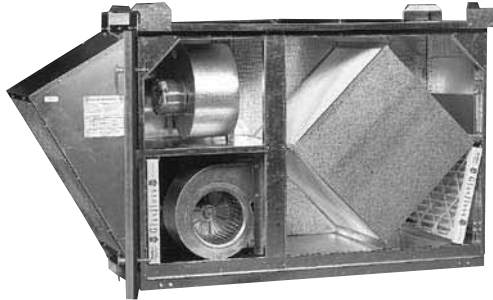

## Specifications

Ventilation Type: Static Plate, Heat and Humidity Transfer					
Typical Airflow Range: 500-1,000 CFM					
AHRI 1060 Certified Core: One L125-00					
Airflow Rating Points (for AHRI): 750 CFM and 560 CFM					
Number Motors: Two					
V	HZ	Phase	FLA	Min. Cir. Amps	Max. Fuse Size
115	60	Single	8.6	19.4	25
208-230	60	Single	4.3	9.7	15
277	60	Single	2.4	5.4	15
208-230	60	Three	2.1	5.2	15
460	60	Three	1.1	2.6	15
Control Voltage: 24 VAC					
Filters: Two total, MERV 8, 2" pleated, 20" x 20" nominal size					
Weight: 300 lbs (unit), 375 lbs (shipping weight)					
Shipping Dimensions: 40" W x 87" L x 45" H					

## G5 Performance

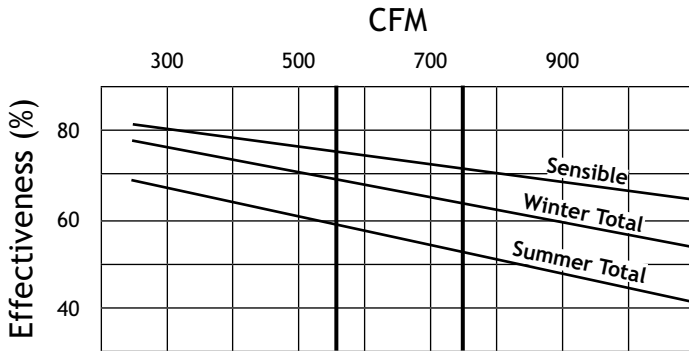

\*At AHRI 1060 standard conditions  
(See certified data on page 67 for core components).

## Airflow Performance

Damper Position	Total Watts		Static Pressure in Adjacent Air Handler (Inches Water Column)									
			-0.5		-0.25		0.0		+0.25		+0.5	
	1 Phase	3 Phase	EA	FA	EA	FA	EA	FA	EA	FA	EA	FA
100% Open	1,295	1,135	865	990	920	945	975	890	1,030	845	1,085	790
65% Open	1,285	1,088	825	950	880	905	935	855	990	805	1,045	760
55% Open	1,275	1,074	815	935	870	890	925	845	980	795	1,035	755
45% Open	1,265	1,030	790	895	840	850	895	810	950	760	1,005	720
35% Open	1,265	951	745	825	795	785	850	745	905	700	950	665
25% Open	1,265	866	700	755	750	715	800	680	860	640	900	605
15% Open	1,260	774	655	685	705	645	750	615	815	580	850	545

# HE1XRTC UNIT DIMENSIONS

EA: Exhaust Air to outdoors  
 OA: Outdoor Air Intake  
 RA: Room Air to be exhausted  
 FA: Fresh Air to inside

