

HE2XRT




Outdoor Unit



Specifications


Ventilation Type: Static Plate, Heat and Humidity Transfer						
Typical Airflow Range: 500-2,000 CFM						
AHRI 1060 Certified Core: Two L125-00						
Airflow Rating Points (for AHRI): 1,500 CFM and 1,126 CFM						
Number Motors: Two belt drive blower/motor packages with adjustable sheaves						
Drive HP	Volts	HZ	Phase	FLA (per motor)	Min. Cir. Amps	Max. Overcurrent Protection Device
1.5	115	60	Single	15.2	34.2	45
	208-230	60	Single	8.2-7.6	18.5	25
	208-230	60	Three	4.5-4.5	10.1	15
	460	60	Three	2.25	5.1	15
	575	60	Three	1.6	3.6	15
2	115	60	Single	20.0	45.0	60
	208-230	60	Single	10.8-10.0	24.3	35
	208-230	60	Three	6.0-5.8	13.5	15
	460	60	Three	2.9	6.5	15
	575	60	Three	2.2	5.0	15
Standard Features: Totally Enclosed Premium Efficiency Motors Motor Starters, Non-fused Disconnect 24 VAC Transformer/Relay Package						
Filters: Four total, MERV 8, 2" pleated, 20" x 20" nominal size						
Weight: 516 lbs (unit), 625 lbs (shipping weight, on pallet)						
Shipping Dimensions: 54" L x 90" W x 48" H						

G5 Performance

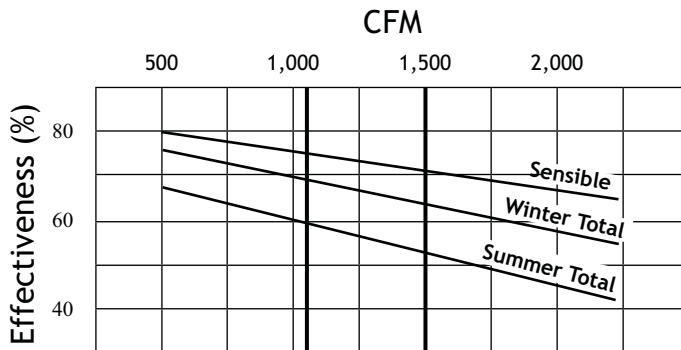

*At AHRI 1060 standard conditions
(See certified data on page 67 for core components).

Base Type/Airflow Orientations

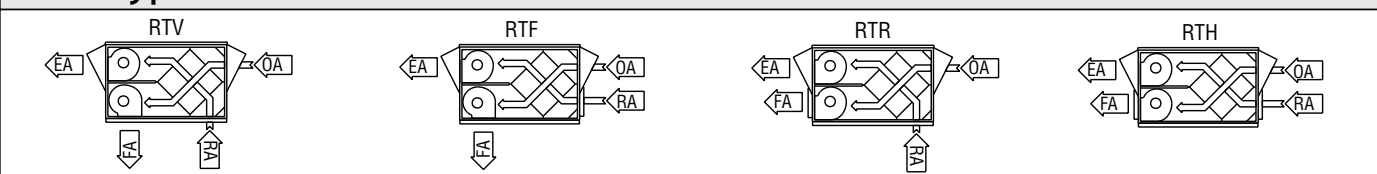

Airflow Performance

Motor HP	Blower RPM	Turns Open	External Static Pressure (in. w.g.)													
			0.00		0.25		0.50		0.75		1.00		1.25		1.50	
			SCFM	BHP	SCFM	BHP	SCFM	BHP	SCFM	BHP	SCFM	BHP	SCFM	BHP	SCFM	BHP
1.5	1192	4	1560	0.7	1460	0.7	1300	0.6	1100	0.5	845	0.4	975	0.6	650	0.4
	1348	2	1765	1.1	1685	1.0	1560	0.9	1380	0.8	1210	0.7	975	0.6	650	0.4
	1504	0	1970	1.5	1900	1.4	1800	1.3	1670	1.2	1500	1.1	1345	1.0	1135	0.8
2	1516	2	2087	1.6	2000	1.5	1915	1.4	1775	1.2	1635	1.1	1475	1.0	1260	0.8
	1594	1	2194	1.8	2110	1.7	2035	1.6	1920	1.5	1765	1.3	1630	1.2	1470	1.1
	1671	0					2145	1.9	2050	1.7	1905	1.5	1775	1.4	1640	1.3

Note: Brake Horse Power (BHP) is for one blower motor package only.

Operation in this zone will likely exceed FLA limits. Operation in this zone outside of core airflow limits.

HE2XR UNIT DIMENSIONS

EA: Exhaust Air to outdoors
 OA: Outdoor Air intake
 RA: Room Air to be exhausted
 FA: Fresh Air to inside

