


HE3XRT




Outdoor Unit

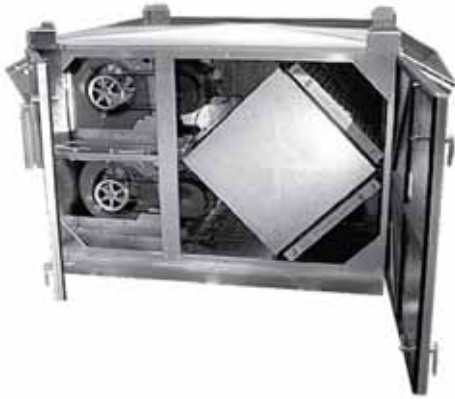

Specifications


Ventilation Type: Static Plate, Heat and Humidity Transfer						
Typical Airflow Range: 750-3,300 CFM						
AHRI 1060 Certified Core: Three L125-00						
Airflow Rating Points (for AHRI): 2,250 CFM and 1,689 CFM						
Number Motors: Two belt drive blower/motor packages with adjustable sheaves						
HP	Volts	HZ	Phase	FLA (per motor)	Min. Cir. Amps	Max. Overcurrent Protection Device
2	115	60	Single	20.0	45.0	60
	208-230	60	Single	10.8-10.0	24.3	35
	208-230	60	Three	6.0-5.8	13.5	15
	460	60	Three	2.9	6.5	15
	575	60	Three	2.2	5.0	15
3	208-230	60	Single	13.0-11.8	29.3	40
	208-230	60	Three	8.65-7.8	19.5	25
	460	60	Three	3.9	8.8	15
	575	60	Three	3.2	7.2	15
	5	208-230	60	Three	14.2-12.8	32.0
460		60	Three	6.4	14.4	20
575		60	Three	5.0	11.3	15
Standard Features: Totally Enclosed Premium Efficiency Motors Motor Starters, Non-fused Disconnect 24 VAC Transformer/Relay Package						
Filters: Six total, MERV 8, 2" pleated, 20" x 20" nominal size						
Weight: 752 lbs (unit), 850 lbs (shipping weight, on pallet)						
Shipping Dimensions: 72" L x 72" W x 65" H						

G5 Performance

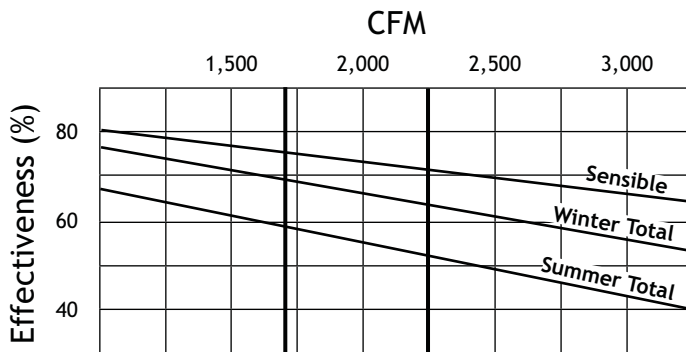

*At AHRI 1060 standard conditions
(See certified data on page 67 for core components).

Base Type/Airflow Orientations

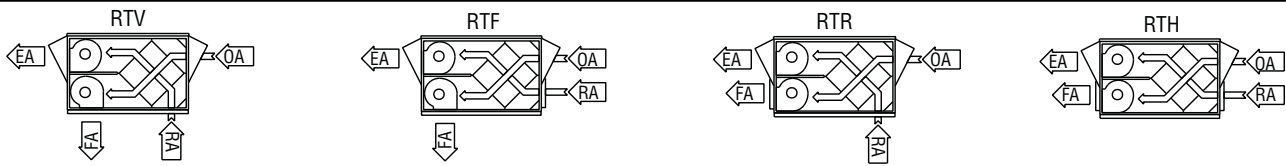

Airflow Performance

Motor HP	Blower RPM	Turns Open	External Static Pressure (in. w.g.)													
			0.00		0.25		0.50		0.75		1.00		1.25		1.50	
			SCFM	BHP	SCFM	BHP	SCFM	BHP	SCFM	BHP	SCFM	BHP	SCFM	BHP	SCFM	BHP
2	1207	4	2130	1.0	1940	0.8	1695	0.6	1340	0.4						
	1347	2	2380	1.4	2210	1.2	2005	1.0	1725	0.8	1365	0.5				
	1488	0	2630	1.9	2470	1.6	2300	1.4	2100	1.2	1800	0.9	1435	0.7	820	0.4
3	1533	3	2790	2.5	2660	2.3	2500	2.1	2290	1.8	2040	1.6	1765	1.3	1265	1.0
	1597	2	2905	2.8	2785	2.6	2630	2.4	2340	2.1	2200	1.9	1955	1.6	1640	1.3
	1661	0.5			2810	3.0	2760	2.7	2585	2.5	2365	2.2	2140	1.9	1890	1.6
	1692	0					2820	2.9	2665	2.7	2450	2.4	2220	2.1	1980	1.8
5	1686	3	3110	3.5	3000	3.2	2890	3.0	2730	2.7	2520	2.4	2295	2.1	2000	1.8
	1764	1.5	3255	4.0	3150	3.7	3045	3.5	2905	3.2	2720	2.9	2520	2.5	2270	2.2
	1843	0			3300	4.2	3200	4.0	3075	3.7	2910	3.4	2715	3.0	2500	2.7

Note: Brake Horse Power (BHP) is for one blower motor package only.

Operation in this zone will likely exceed FLA limits. Operation in this zone outside of core airflow limits.

HE3XRT UNIT DIMENSIONS

EA: Exhaust Air to outdoors
 OA: Outdoor Air Intake
 RA: Room Air to be exhausted
 FA: Fresh Air to inside

